

CATEGORY	DESCRIPTION	P/N #
CONNECTOR	MJ45 8P8C SMT H=7.5mm 反口	MJ88-BX11-HRV7-X

料号由原 MJ88-BX11-HRV7
变更为 MJ88-BX11-HRV7-X

REV.	ECN NO	DESCRIPTION	REVISED	DATE
A01		New Release	XSY	2014.12.25
A02		增加包装方式选项	XHY	2017.7.31





Part No.:

MJ88-BX11-HRV7-X

X	Terminal Plating
0	Au 1u" Plating
1	Au 3u" Plating
2	Au 6u" Plating
3	Au 15u" Plating

X	包装方式
C	卷带包装
P	吸塑盒包装

- SPECIFICATIONS:
1. Voltage: 150V AC RMS
 2. Current Rating: 1.5A
 3. Contact Resistance: 40mΩ MAX.
 4. Insulation Resistance: 500MΩ MIN.
 5. Dielectric Withstanding Voltage :500V AC
 6. Operate Temperature: -40°C~80°C
 7. Durability: 750 Mating Cycles MIN.

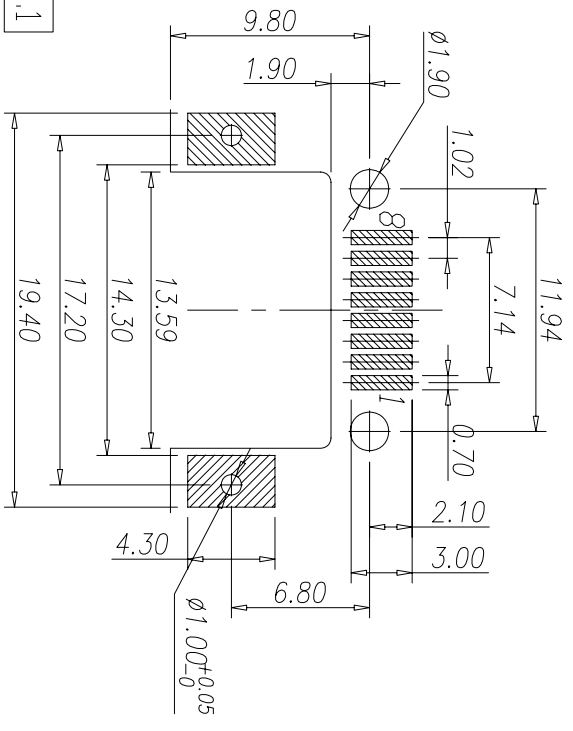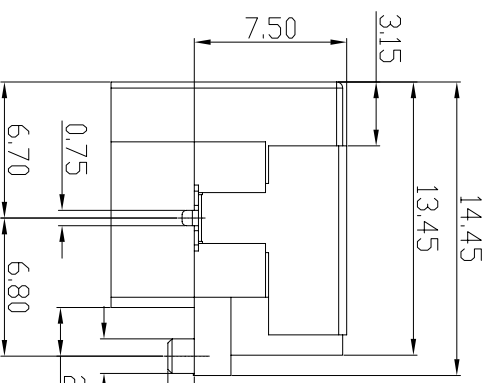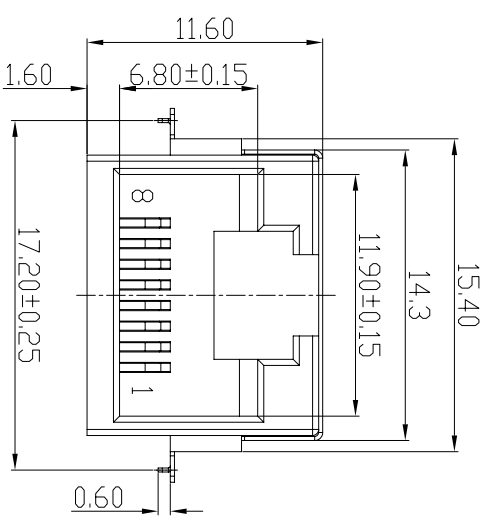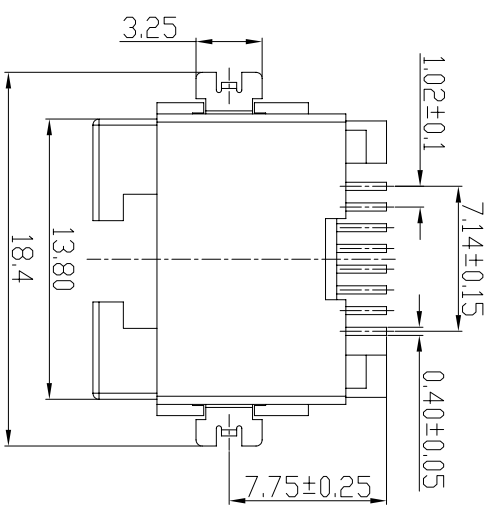

Recommend PCB Layout
Jack Top View
Tolerance: ±0.05mm

C	SHELL	1	BRASS T=0.2mm	Ni PLATING	
b	TERMINAL	8	PHOSPHOR BRONZE T=0.3mm	Au/Tin PLATING	
a	HOUSING	1	LCP+30%GF UL94V-0	BLACK	
NO.	PART NAME	QTY	MATERIAL	PLATING & COLOR	Remark

UNLESS OTHERWISE SPECIFIED TOLERANCES	DECIMALS:	ANGLES:
	X : ±0.5	X : ±2°
	X.X : ±0.3	X.X : ±1°
	X.XX : ±0.2	

东莞市合陵电子有限公司
 Dongguan Heling Electronic Co.,LTD
 Connector
 SCALE: 1/1 UNIT: mm
 SIZE: A3 PAGE: 1 OF 1 REV: A02
 APPROVED BY: _____ CHECKED BY: _____ PREPARED BY: XSY
 CUSTOMER COPY