CATEGORY	DESCRIPTION	P/N #
CONNECTOR	Modular Jack, 8P8C, 1X1PORT 短脚	MJ88-BX11-JRVS1-1X

料号由原 MJ88-BX11-JRVS1-1
变更为 MJ88-BX11-JRVS1-1X

REV.	ECN NO	DESCRIPTION	REVISED	DATE
A01	———	New Release	XSY	2014.01.11
A02	———	增加包装方式选项	XSY	2017.11.08

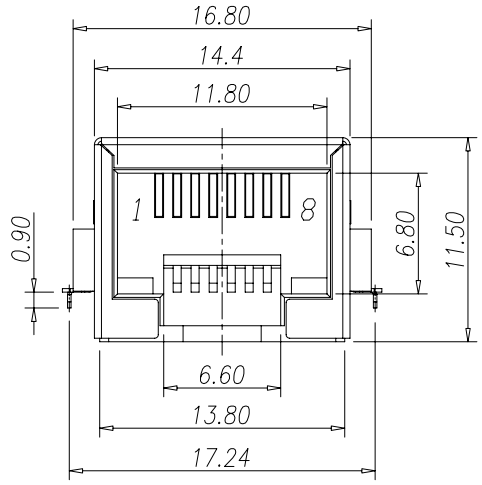

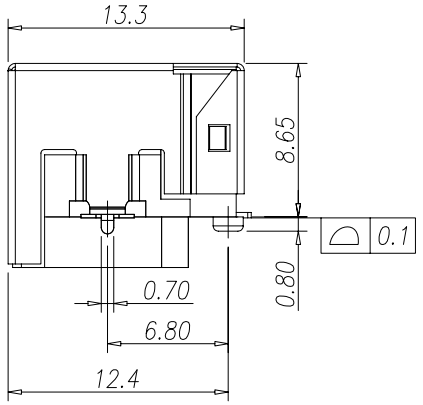



SPECIFICATIONS:

1. Voltage: 150V AC RMS
2. Current Rating: 1.5A
3. Contact Resistance: 40m Ω MAX.
4. Insulation Resistance: 500MΩ MIN.
5. Dielectric Withstang Voltage :1000V AC
6. Operature Temperature: -40°C~80°C
7. Durability: 500 Mating Cycles MIN.

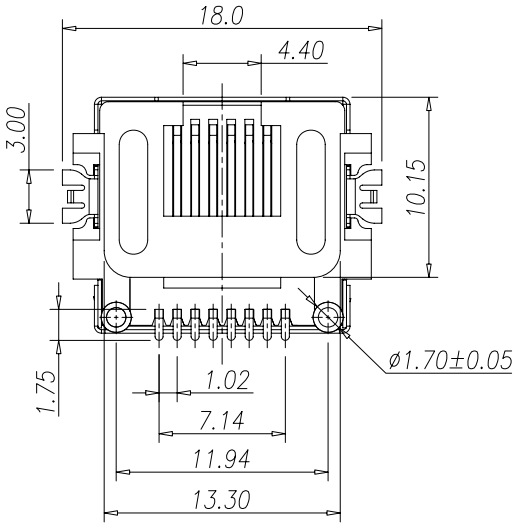

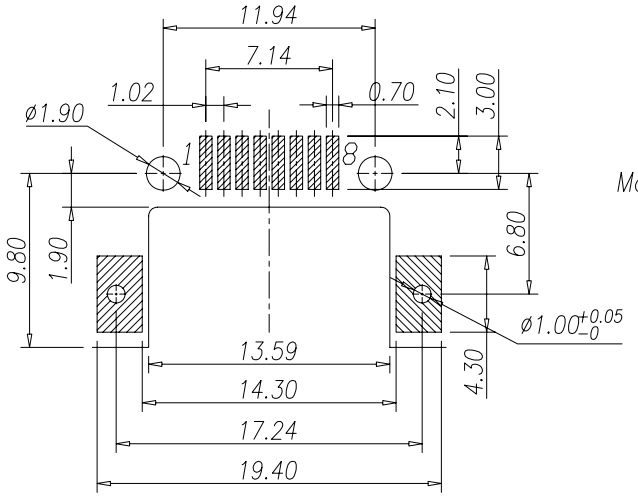

Recommend PCB Layout
(Jack Top View)
Tolerance: ±0.05mm

Part No.:
MJ88-BX11-JRVS1-1X

Material & Plating

X	Terminal Plating
0	Au 1u" Plating
1	Au 3u" Plating
2	Au 6u" Plating
3	Au 15u" Plating

X	包装方式
C	卷带包装
P	吸塑盒包装

NO.	PART NAME	Q'TY	MATERIAL	PLATING & COLOR	Remark
c	Shielding	1	Brass	Ni Plating	
b	Terminal	8	Phosphor Bronze	Au/Tin Plating	
a	Housing	1	LCP UL94V-0	Black	

UNLESS OTHERWISE SPECIFED TOLERANCES

DECIMALS:
X :±0.5
X.X :±0.3
X.XX :±0.2

ANGLES:
X :±2°
X.X :±1°

東莞市合陵電子有限公司
DongGuan HeLing Electronic Co.,LTD

SCALE:1/1 | UNIT: mm | DWG.NO:
SIZE: A3 | PAGE:1 OF 1 | REV:A01

APPROVED BY	CHECKED BY	PREPARED BY
		XSY

CUSTOMER COPY